

CAR WELLNESS INGOLSTADT / Germany

Conveyor tunnel car wash with self-service



COMPACT BASIN



ACTIVATION BASIN




WATERTEC® WT 40

REQUIREMENTS:


- Waste water treatment for the new building of the car wash centre
- Basin technology with PEHD inliner avoids problems during general inspections for the next decades
- Best process water quality
- Lowest service and maintenance requirement
- Reserve capacity even at maximum load

SOLUTION:

- Coarse material separation in oval basins with PEHD inliner
- Activation stage and extraction basin
- Fine material separation with WATERTEC WT 40 (40,000 l/h)
- Excess water and waste water are discharged directly into the sewer via the SYSTEM H-C2 high-performance separator

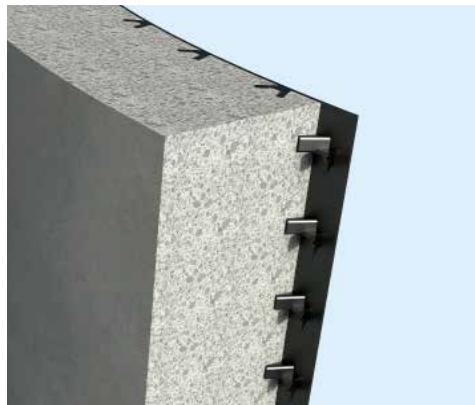

PEHD INLINER

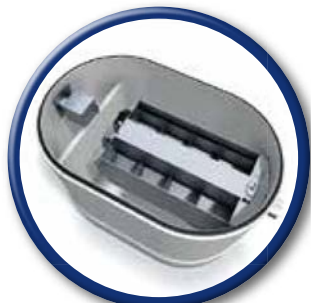

SYSTEM H-C2